



GENERAL FEATURES

- Rack size **40x40 cm**
- Gross weight: 47 Kg
- Washing cycles / racks/hour : 90°-120°-180°-∞/
40-30-20
- Top and bottom wash/rinse arm
- Wash pump 330 W
- Boiler capacity 3 liters
- Tank capacity 12 liters
- Boiler heating element 2,8 kW
- Tank heating element 2,4 kW
- Water quantity per cycle: 2 liters
- Electronic controls with color code switch
- Extractable control panel
- Useful washing height: 300 mm
- Magnetic door microswitch
- Automatic water filling
- Built-in electric rinse-aid dispenser
- Built-in electric detergent dispenser
- Hot rinse
- Thermostop function
- Anti back-flow valve
- Automatic end-of-day self cleaning of water tank
- Washing pump with Soft-Start

FILTRATION

- Plastic wash pump filter, easily removable

BODY

- AISI 304 stainless steel Body
- Partial double skinned body
- Preformed wash tank
- Preformed rack guides
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304
- PVC protection rear the bottom front panel

EQUIPMENT AS GLASSWASHER

- 2 glass racks 40x40 cm
- 1 cutlery small basket
- 1 insert for saucers
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

OPTIONAL

- Drain pump
- External water softener
- External osmose unit

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided



WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

TECHNICAL SPECIFICATIONS

- Voltage: **230V 50 Hz**
- Total power : **3,13 kW**
- Amperage: **14 A**
- Power cord supply size :**3x1,5**

FK 40.30E LS

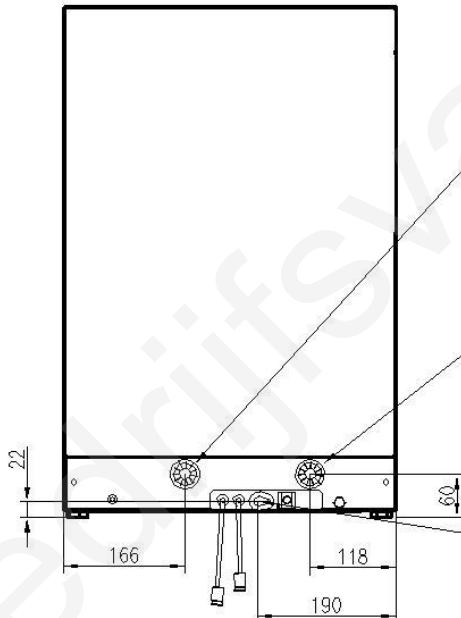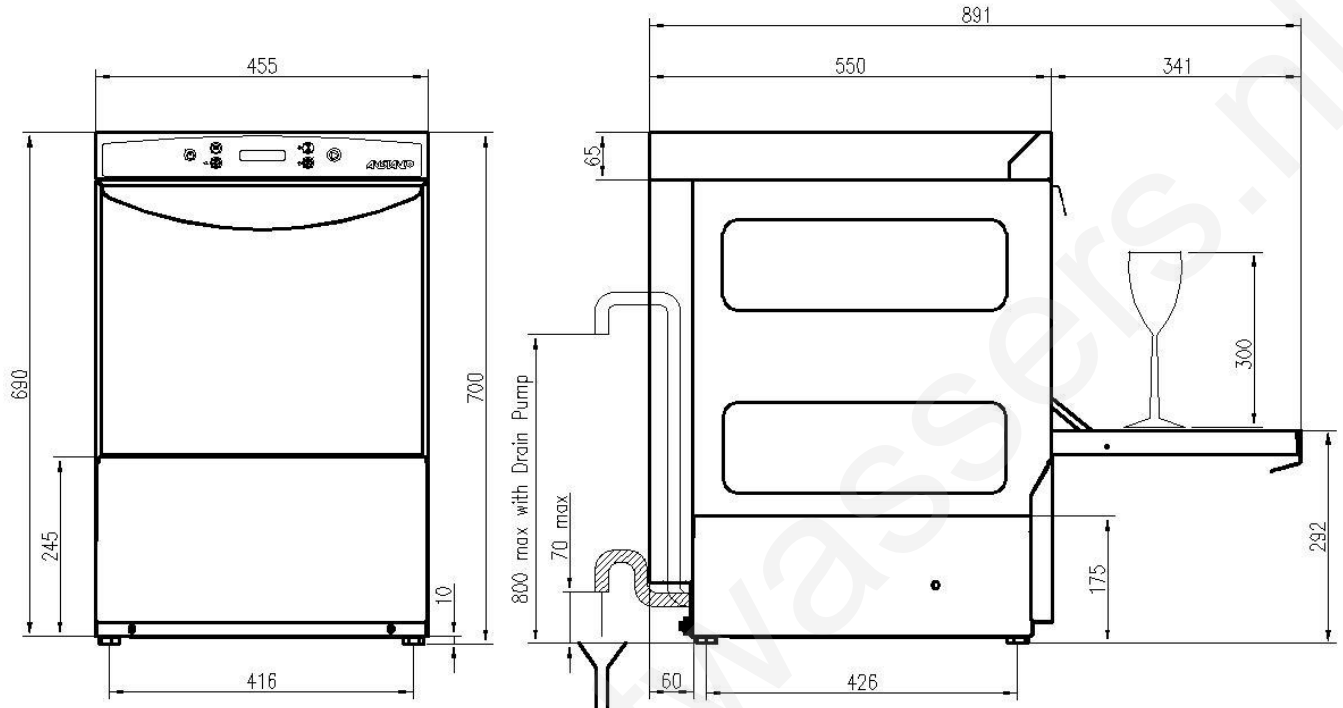




USCITA TUBO DI SCARICO Ø INT. mm.20 L=mm.2500
 EXIT WATER OUTLET PIPE INT. Ø 20 mm. L=mm.2500.
 OUVERTURE DE PASSAGE TUYAU DE VIDANGE Ø INT. 20 mm. L=mm.2500.

CANNA DI CARICO CON ATTACCO G 3/4" L=mm. 2000.
 WATER INLET PIPE CONNECTION G 3/4" L=mm 2000.
 OUVERTURE DE PASSAGE TUYAU D'ALIMENTATION EAU AVEC
 CONNEXION G 3/4" L=mm 2000.

USCITA CAVO DI ALIMENTAZIONE
 EXIT POWER CORD SUPPLY
 OUVERTURE DE PASSAGE CABLE D'ALIMENTATION

VISTA POSTERIORE
 REAR OF MACHINE
 VUE ARRIERE

	Min 10°C-MAX 50°C Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar) 100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20°f-2.8÷11°d